

# A Stochastic Resource-Sharing Network for Electric Vehicle Charging

**Bert Zwart**

CWI Amsterdam


Edinburgh

January 16, 2018


joint work with Angelos Avelklouris and Maria Vlasidou (TU Eindhoven)

# The rise of Electric Vehicles

## Evolution of the global electric car stock, 2010-16


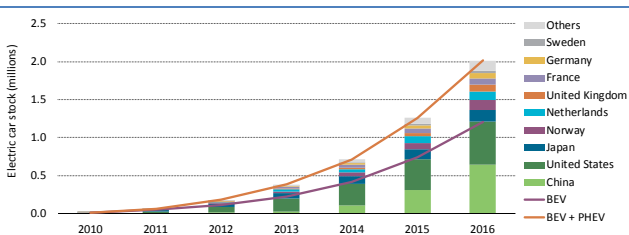


## Deployment scenarios for the stock of electric cars to 2030

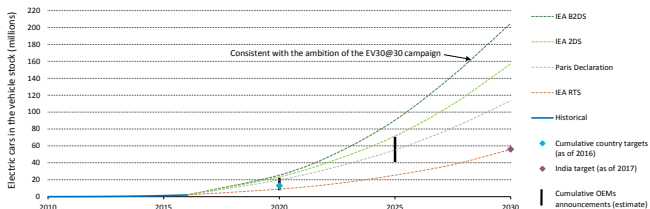


# Charging electric vehicles, baking pizzas, and melting a fuse in Lochem

G. Hoogsteen, J. Hurink, G. Smit, et al. Proc. CIRED (2017)

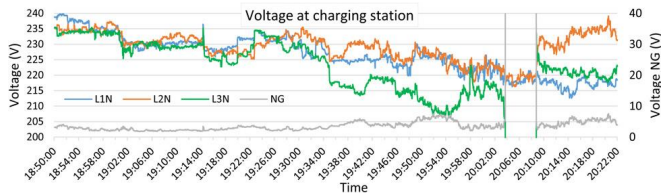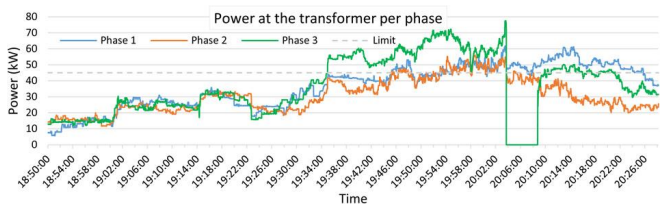


# EV charging: stochastic process on interacting networks

- / charging stations

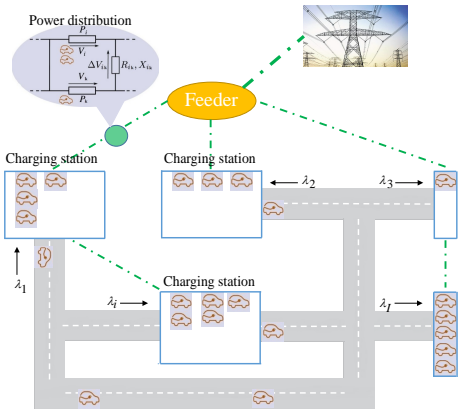


# EV charging: stochastic process on interacting networks

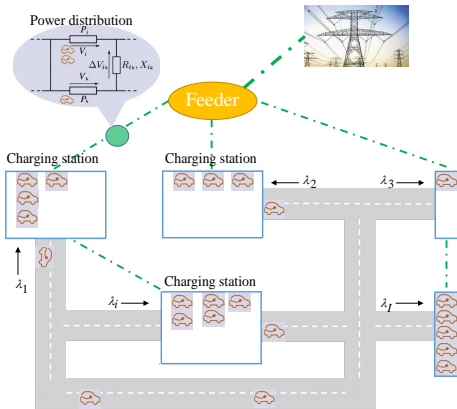


- $I$  charging stations
- $K_i$  parking spaces

# EV charging: stochastic process on interacting networks

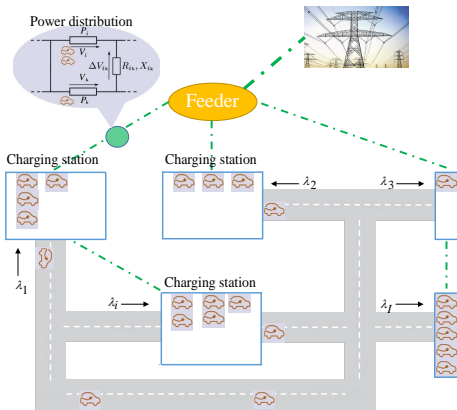


- $I$  charging stations
- $K_i$  parking spaces
- Arrivals:  $\lambda_i$

# EV charging: stochastic process on interacting networks

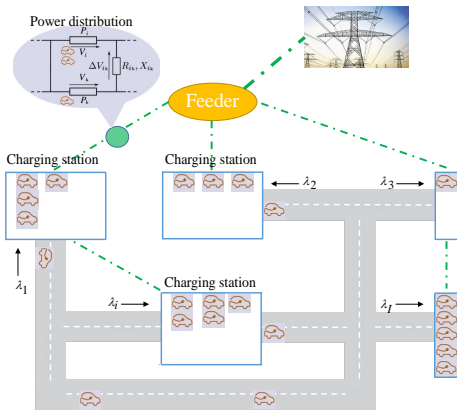

- $I$  charging stations
- $K_i$  parking spaces
- Arrivals:  $\lambda_i$
- Charging requirement:  $B$


# EV charging: stochastic process on interacting networks

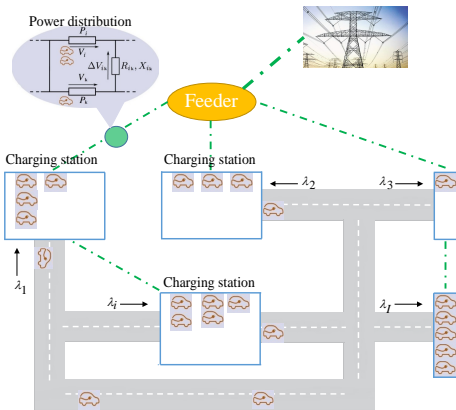

- $I$  charging stations
- $K_i$  parking spaces
- Arrivals:  $\lambda_i$
- Charging requirement:  $B$
- Parking time:  $D$




# EV charging: stochastic process on interacting networks

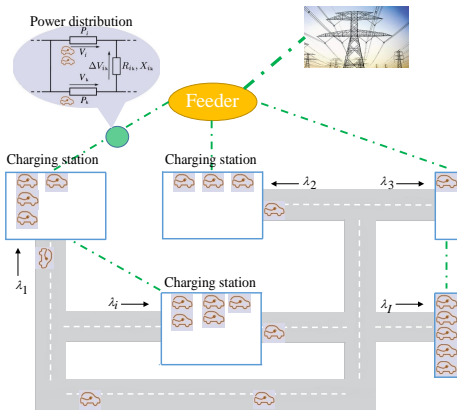


- $I$  charging stations
- $K_i$  parking spaces
- Arrivals:  $\lambda_i$
- Charging requirement:  $B$
- Parking time:  $D$
- $Q_i(t)$  : Number of EVs

# EV charging: stochastic process on interacting networks

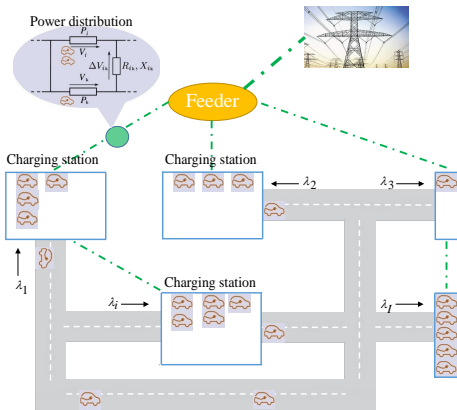

- $I$  charging stations
- $K_i$  parking spaces
- Arrivals:  $\lambda_i$
- Charging requirement:  $B$
- Parking time:  $D$
- $Q_i(t)$  : Number of EVs
- $Z_i(t)$  : Number of uncharged EVs

# EV charging: stochastic process on interacting networks

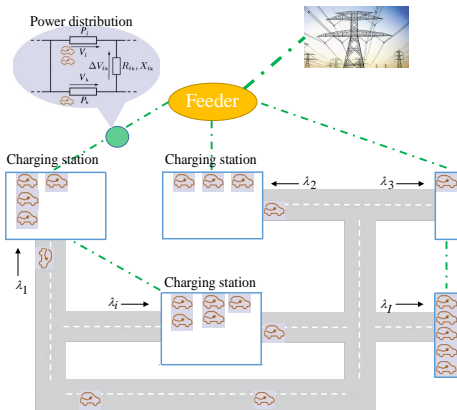

- $I$  charging stations
- $K_i$  parking spaces
- Arrivals:  $\lambda_i$
- Charging requirement:  $B$
- Parking time:  $D$
- $Q_i(t)$  : Number of EVs
- $Z_i(t)$  : Number of uncharged EVs

Aim: efficient charging schedule while keeping voltage drop bounded

- R. C. Larson and K. Sasanuma. Congestion pricing: A parking queue model. *Journal of Industrial and Systems Engineering*, 4(1):1–17, 2010.
- E. Yudovina and G. Michailidis. Socially optimal charging strategies for electric vehicles. *IEEE TAC*, 60(3):837–842, 2015.
- R. Carvalho, L. Buzna, R. Gibbens, F. Kelly. Critical behaviour in charging of electric vehicles. *New J. Phys.*, 17(9): 095001, 2015.
- J. Cruise, S. Shneer (2018). Almost finished work on stability properties.

Important distinction: fast vs. slow charging

# Assessing voltage drop: a tractable load flow model

- **Linearized Distflow:**  $W_{kk}^{lin} := |V_k^{lin}|^2$

$$W_{kk}^{lin} = W_{00} - 2 \sum_{\epsilon_{ls} \in \mathcal{P}(k)} R_{ls} \sum_{m \in \mathcal{I}(s)} z_m p_m,$$

- $\mathbf{z} = (z_i, i \geq 1)$  denotes the number of uncharged EVs in the network at some particular time
- **Each EV at node  $i$**  receives power  $p_i$
- $\sum_{m \in \mathcal{I}(s)} z_m p_m$  is the consumed power by subtree rooted in node  $s$

# Assessing voltage drop: a tractable load flow model

- **Linearized Distflow:**  $W_{kk}^{lin} := |V_k^{lin}|^2$

$$W_{kk}^{lin} = W_{00} - 2 \sum_{\epsilon_{ls} \in \mathcal{P}(k)} R_{ls} \sum_{m \in \mathcal{I}(s)} z_m p_m,$$

- $\mathbf{z} = (z_i, i \geq 1)$  denotes the number of uncharged EVs in the network at some particular time
  - **Each EV at node  $i$**  receives power  $p_i$
  - $\sum_{m \in \mathcal{I}(s)} z_m p_m$  is the consumed power by subtree rooted in node  $s$
- Our main results also hold for more general AC (on trees)

# Assessing voltage drop: a tractable load flow model

- **Linearized Distflow:**  $W_{kk}^{lin} := |V_k^{lin}|^2$

$$W_{kk}^{lin} = W_{00} - 2 \sum_{\epsilon_{ls} \in \mathcal{P}(k)} R_{ls} \sum_{m \in \mathcal{I}(s)} z_m p_m,$$

- $\mathbf{z} = (z_i, i \geq 1)$  denotes the number of uncharged EVs in the network at some particular time
  - **Each EV at node  $i$**  receives power  $p_i$
  - $\sum_{m \in \mathcal{I}(s)} z_m p_m$  is the consumed power by subtree rooted in node  $s$
- Our main results also hold for more general AC (on trees)
  - Next: how to schedule amount of power for each battery

# Power allocation: use network utility maximization

- $\mathbf{z} = (z_i, i \geq 1)$ : number of uncharged EVs in the network
- $\mathbf{p} = (p_i, i \geq 1)$ : allocated power to vehicles at node  $i$
- Each EV receives utility  $u_i(p_i)$ . Example:  $u_i(p_i) = w_i \log(p_i)$



# Power allocation: use network utility maximization

- $\mathbf{z} = (z_i, i \geq 1)$ : number of uncharged EVs in the network
- $\mathbf{p} = (p_i, i \geq 1)$ : allocated power to vehicles at node  $i$
- Each EV receives utility  $u_i(p_i)$ . Example:  $u_i(p_i) = w_i \log(p_i)$

$$\mathbf{p} = \arg \max \sum_{i=1}^I z_i u_i(p_i)$$

$$\text{subject to } z_i p_i \leq M_i, \quad 0 \leq p_i \leq c^{\max},$$
$$\underline{v}_i \leq W_{ii}^{\text{lin}}(\mathbf{p}, \mathbf{z}) \leq \bar{v}_i$$

# Power allocation: use network utility maximization

- $\mathbf{z} = (z_i, i \geq 1)$ : number of uncharged EVs in the network
- $\mathbf{p} = (p_i, i \geq 1)$ : allocated power to vehicles at node  $i$
- Each EV receives utility  $u_i(p_i)$ . Example:  $u_i(p_i) = w_i \log(p_i)$

$$\mathbf{p} = \arg \max \sum_{i=1}^I z_i u_i(p_i)$$

$$\text{subject to } z_i p_i \leq M_i, \quad 0 \leq p_i \leq c^{\max}, \\ \underline{v}_i \leq W_{ii}^{\text{lin}}(\mathbf{p}, \mathbf{z}) \leq \bar{v}_i$$

- Key challenge: implementation by market mechanism. [Kelly (1997): communication networks.]
- This talk: assess performance

# Solvable special case: product-form property

## Proportional fairness in line network

Consider line network with  $K_i = M_i = \infty$  for all  $i$ ,  $c^{\max} = \infty$ .  
If  $u_i(\rho_i) = \log \rho_i$ , then for every  $\mathbf{n} \in \mathbb{N}_+^I$ ,

$$\lim_{t \rightarrow \infty} \mathbb{P}(\mathbf{Z}(t) = \mathbf{n}) = (1 - \rho) \left( \sum_{i=1}^I n_i \right)! \prod_{i=1}^I \frac{\rho_i^{n_i}}{n_i!},$$

provided  $\rho = \sum_{i=1}^I \rho_i = \sum_{i=1}^I \lambda_i \mathbb{E}[B] \bar{R}_i / \delta < 1$ .

# Solvable special case: product-form property

## Proportional fairness in line network

Consider line network with  $K_i = M_i = \infty$  for all  $i$ ,  $c^{\max} = \infty$ .  
If  $u_i(p_i) = \log p_i$ , then for every  $\mathbf{n} \in \mathbb{N}_+^I$ ,

$$\lim_{t \rightarrow \infty} \mathbb{P}(\mathbf{Z}(t) = \mathbf{n}) = (1 - \rho) \left( \sum_{i=1}^I n_i \right)! \prod_{i=1}^I \frac{\rho_i^{n_i}}{n_i!},$$

provided  $\rho = \sum_{i=1}^I \rho_i = \sum_{i=1}^I \lambda_i \mathbb{E}[B] \bar{R}_i / \delta < 1$ .

- Proof idea: reduction to multi-class Processor queue

# Solvable special case: product-form property

## Proportional fairness in line network

Consider line network with  $K_i = M_i = \infty$  for all  $i$ ,  $c^{\max} = \infty$ .  
If  $u_i(\rho_i) = \log \rho_i$ , then for every  $\mathbf{n} \in \mathbb{N}_+^I$ ,


$$\lim_{t \rightarrow \infty} \mathbb{P}(\mathbf{Z}(t) = \mathbf{n}) = (1 - \rho) \left( \sum_{i=1}^I n_i \right)! \prod_{i=1}^I \frac{\rho_i^{n_i}}{n_i!},$$

provided  $\rho = \sum_{i=1}^I \rho_i = \sum_{i=1}^I \lambda_i \mathbb{E}[B] \bar{R}_i / \delta < 1$ .

- Proof idea: reduction to multi-class Processor queue
- New application of Processor Sharing after mainframe computer systems (70s) and communication networks (90s).

# Issues with classical performance analysis

- Markov Chain (MC) model (assuming exponential rv's)

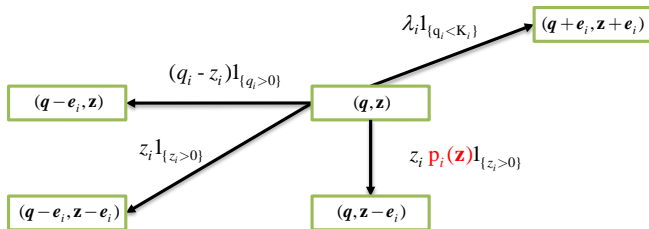

$$p(\mathbf{z}) = \arg \max_{\mathbf{p}} \sum_{i=1}^I z_i u_i(p_i)$$

- Computing the equilibrium distribution of the MC easily requires solving quadrillions of convex optimization problems.
- Things are even worse for non-exponential distributions, so we need another approach.

## Scaling:

- Consider a family of models indexed by  $n$
  - Capacity of power in the  $n^{\text{th}}$  system:  $nM_i$
  - Arrival rate in the  $n^{\text{th}}$  system:  $n\lambda_i$
  - Number of parking spaces in the  $n^{\text{th}}$  system:  $nK_i$
- 
- Fluid approximation at time  $t \geq 0$ :  $\mathbf{z}(t) = (z_i(t), i \geq 1)$
  - $z_i(t) \rightarrow z_i^*$  as  $t \rightarrow \infty$  and  $z_i^*$  is an invariant point

## Characterization of performance

$\mathbf{z}^*$  is given by  $z_i^* = \frac{\Lambda_i^*}{g_i^{-1}(\Lambda_i^*)}$ , with

$$\Lambda^* = \arg \max \sum_{i=1}^I G_i(\Lambda_i)$$

subject to  $\Lambda_i \leq M_i, \quad 0 \leq \Lambda_i \leq g_i(c^{\max}),$

$$\underline{v}_i \leq W_{ii}^{lin}(\boldsymbol{\Lambda}) \leq \bar{v}_i,$$

$G_i'(\cdot) = u_i'(g_i^{-1}(\cdot))$  with

$g_i(x) := \gamma_i \mathbb{E}[\min\{Dx, B\}]$  and  $\gamma_i = \min\{\lambda_i, K_i \mathbb{E}[D]\}$ .



## Characterization of performance

$\mathbf{z}^*$  is given by  $z_i^* = \frac{\Lambda_i^*}{g_i^{-1}(\Lambda_i^*)}$ , with

$$\Lambda^* = \arg \max \sum_{i=1}^I G_i(\Lambda_i)$$

subject to  $\Lambda_i \leq M_i, \quad 0 \leq \Lambda_i \leq g_i(c^{\max}),$

$$\underline{v}_i \leq W_{ii}^{lin}(\mathbf{\Lambda}) \leq \bar{v}_i,$$

$G_i'(\cdot) = u_i'(g_i^{-1}(\cdot))$  with

$g_i(x) := \gamma_i \mathbb{E}[\min\{Dx, B\}]$  and  $\gamma_i = \min\{\lambda_i, K_i \mathbb{E}[D]\}$ .

Fraction of cars that get successfully charged:  $P(D > Bz_i^*/\Lambda_i^*)$ .

## Idea of the proof: Little is known

- Little's law: (Expected number of customers) = (arrival rate)  $\times$  (sojourn time)
- Snapshot principle: constant service rate in equilibrium
- $z_i^* = \gamma_i \mathbb{E}[\min\{D, \frac{B}{\rho_i(z^*)}\}]$
- Add this approximate version of Little's law to Karush-Kuhn-Tucker (KKT) equations for optimization problem that defines  $p(z)$ .
- Still works for AC in this case, as convex relaxation of associated semi-definite program is exact.

# Validating Distflow (two lots, Markovian model)

Table: Stochastic model

$K$	$\mathbb{E}[Z_1], \mathbb{E}[Z_2]$ (Distflow)	$\mathbb{E}[Z_1], \mathbb{E}[Z_2]$ (AC)	Rel. error
10	4.5336, 4.6179	4.6801, 4.6924	3.13 %, 1.58 %
20	14.0174, 14.0385	14.1725, 14.1948	1.09 %, 1.10 %

Table: Fluid approximation

$K$	$z_1^*, z_2^*$ (Distflow)	$z_1^*, z_2^*$ (AC)	Rel. error
10	4.5769, 4.5769	4.7356, 4.7513	3.35%, 3.67%
20	14.0300, 14.0300	14.1849, 14.2069	1.09%, 1.25%
30	23.6820, 23.6820	23.8357, 23.8597	0.64%, 0.74%
40	33.4293, 33.4293	33.5823, 33.6073	0.45%, 0.53%
50	43.2330, 43.2330	43.3857, 43.4112	0.35%, 0.41%

# Validating the fluid approximation

Relative error		
$K$	Distflow	AC
10	0.95%, 0.86%	1.18%, 1.25%
20	0.09%, 0.06%	0.08%, 0.08%

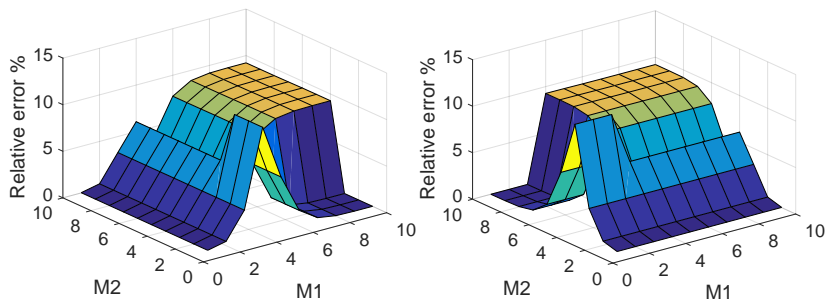


Figure:  $\mathbf{K} = (10, 10)$  and  $\boldsymbol{\lambda} = (12, 12)$

# Designing control rules

- **Goal:** Choose weights that maximize the fraction of EVs that get successfully charged under weighted proportional fairness, i.e.,  
 $u_i(p_i) = w_i \log(p_i)$

# Designing control rules

- **Goal:** Choose weights that maximize the fraction of EVs that get successfully charged under weighted proportional fairness, i.e.,  
 $u_i(p_i) = w_i \log(p_i)$
- For a line network topology,  $M_i = c^{\max} = \infty$ , it can be shown that this fraction can be optimized by choosing the weights as follows:

$$\begin{aligned} \max_{\mathbf{w}} \quad & \sum_{i=1}^I \gamma_i \mathbb{P}(w_i D > \bar{R}_i B) \\ \text{subject to} \quad & \sum_{i=1}^I \gamma_i \mathbb{E}[\min\{w_i D, \bar{R}_i B\}] \leq \delta \end{aligned}$$

Non-convex, depends on the joint distribution of  $(B, D)$

Weight-finding problem can be transformed into

$$\begin{aligned} \max_{\mathbf{x}} \quad & \sum_{i=1}^I \gamma_i x_i \\ \text{subject to} \quad & \sum_{i=1}^I \mathbb{E}[D] \gamma_i \bar{R}_i H x_i \leq \delta, \quad x_i \in \{0, 1\} \end{aligned}$$

Knapsack problem

Yields distributionally robust solution (i.e. homogeneous user preferences are the worst if the system is overloaded)

$B = HD$ ,  $H$  decreasing hazard rate.

Example:  $H \sim \text{Pareto}(\alpha, \kappa)$ , i.e.,  $\mathbb{P}(H > x) = (\frac{\kappa}{x+\kappa})^\alpha$ ,  $x \geq 0$ ,  $\alpha > 1$ ,  $\kappa > 0$ .

Weight-finding problem can be transformed into a convex programming problem:

$$\begin{aligned} \max_{\mathbf{y}} \quad & \sum_{i=1}^I \gamma_i (1 - y_i^{\alpha/(\alpha-1)}) \\ \text{subject to} \quad & \sum_{i=1}^I \frac{\mathbb{E}[D]^{\kappa} \gamma_i \bar{R}_i}{1 - \alpha} (y_i - 1) \leq \delta, \quad 0 \leq y_i \leq 1 \end{aligned}$$



# Optimal selection of weights

Assume 10 nodes with  $\sum_{i=1}^{10} \frac{\mathbb{E}[B] \gamma_i \bar{R}_i}{\delta} = 1.2$

The optimal weights are given by:

Table:

Det.	0.06	0.09	0.11	0.12	0.13	0.14	0.15	0.16	0	0	8
Pareto (3)	0.12	0.11	0.10	0.10	0.09	0.09	0.09	0.08	0.08	0.08	9.5
Pareto (1.1)	0.11	0.10	0.10	0.09	0.09	0.09	0.09	0.09	0.09	0.09	10

The more variability, the better the system performance

# Concluding comments

- A. Avelklouris, M. Vlasίου, and B. Zwart, A Stochastic Resource-Sharing Network for Electric Vehicle Charging, <https://arxiv.org/pdf/1711.05561>. (Submitted to the special energy issue of IEEE Transactions on Control of Network Systems)
- Multiclass extension: see preprint
- Currently working out a rigorous justification of the fluid scaling, allowing time-varying arrival rates
- Challenges: time-dependent behavior, controlling arrival rates of cars, incorporating markets explicitly, reducing communication overhead by discretizing time, adding reactive power support, allowing for additional (noisy) behavior of other types of users, ...